


Enhance your
homes and
lives with
**Cosmo Sunshield
Window Films**





Cosmo Sunshield: Redefining Excellence in Window Films

Welcome to Cosmo Sunshield, a business of Cosmo First, where we revolutionize window films with a blend of innovation, style, and sustainability. With over four decades of industry leadership, our premium window films have become integral to architecture.

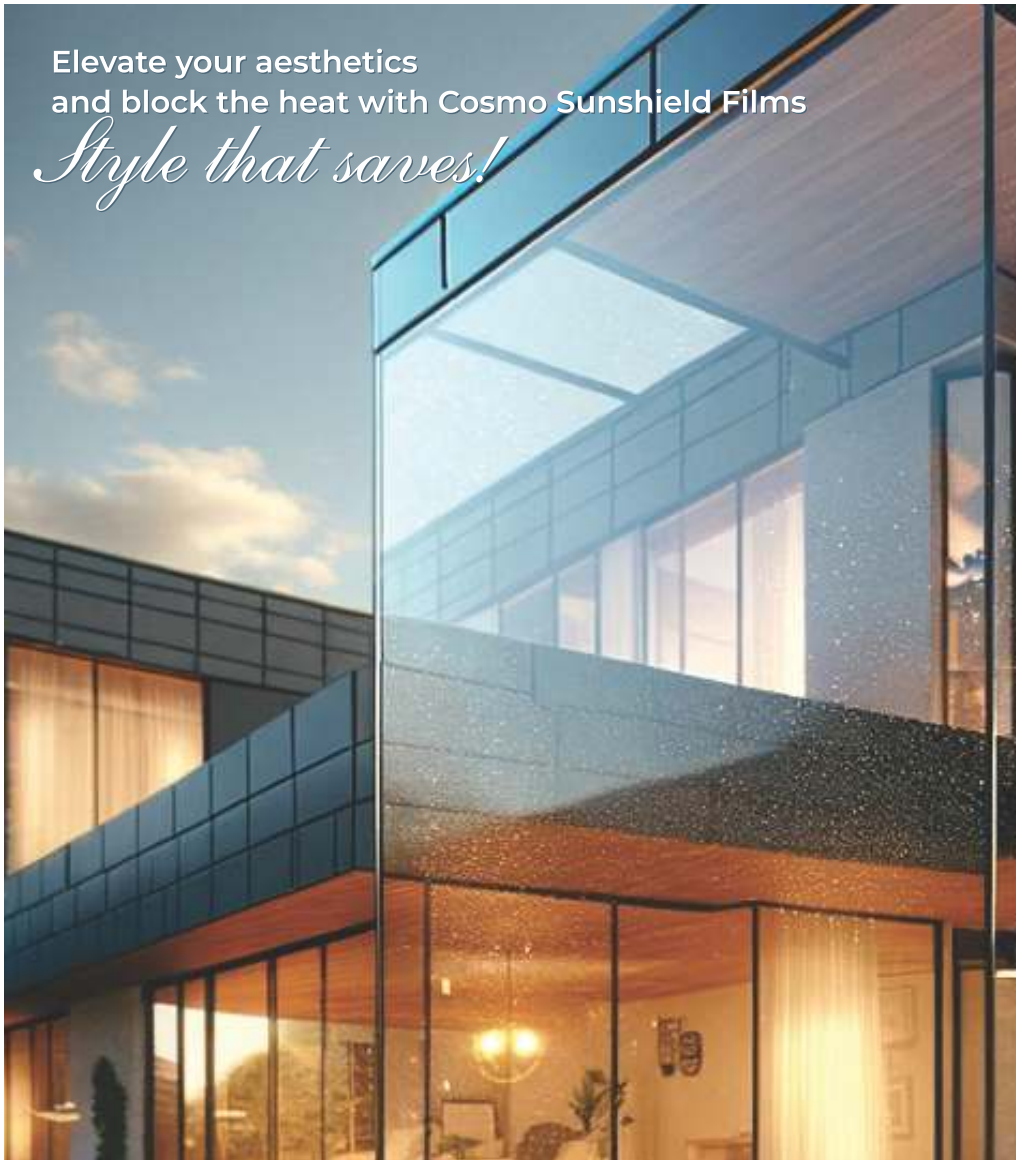

Up to 95%
IR Heat Rejection



Up to 10% Saving on
electricity bill



Over 99%
UV Protection



Glare Reduction

Why Choose Cosmo Sunshield?

Enjoy Comfort and Savings:

Our window films reduce solar heat and glare while blocking over 99% of UV rays, enhancing comfort and energy efficiency in homes, cars and commercial spaces.

Unrivaled Expertise:

In speciality films, our top-notch expertise defines our commitment to perfection and continuous innovation in every product.

Environmental Responsibility:

We prioritize sustainability by using energy-saving window films that provide protection from the sun, contributing to a greener and safer future.

Discover Cosmo Sunshield - Elevating Spaces with Excellence in window films.



Rainbow Series

Cosmo Sunshield's Rainbow Series redefines solar protection, offering cutting-edge solutions with unique nano pigment technology. Immerse yourself in an environment where unmatched comfort and energy efficiency converge to transform indoor spaces. With top-notch solar defense, this series seamlessly enhances your surroundings, providing protection and a comprehensive solution for elevated living.

Applications: _____



Residential Applications



Commercial, Leisure Places & Office Buildings



Automotive Applications



Hospitality



Government Buildings

Benefits: _____



Reduced Energy Consumption



Sun UV Protection



Cost-Effective Solution



Rainbow Series

2Ply 1.5Mil
CS-300-P-1463

SOLAR PROPERTIES

Visible Light Transmission	14%
Ultraviolet Rejected	>99%
Infra Red Heat Rejected	66%
Total Solar Energy Rejected	53%
Glare Reduction	84%
Shading Coefficient	0.52
SHGC(G-Value)	0.47



14%
Visible Light Transmittance



53%
Solar Energy Rejection

Unmatched solar defense,
elevated living.





Ultra Cool Series

Ultra Cool Series is a revolutionary range of Cosmo Sunshield Window Films that combines style and functionality for top-notch performance in any environment. This range sets a new standard for optimal performance in Sunshield technology. Discover the power of Energy Efficiency with our ultra cool series today.

Applications:



Residential Applications



Commercial and Office Buildings



Automotive Applications











Railways, and Marine Applications



Government Buildings

Benefits:

 Higher Energy Efficiency	 High Longevity	 Aesthetically Pleasant Look	 Fade Protection
 Sun UV Protection	 Safety and Security	 Glare Reduction	 Low Reflectivity




Rainbow Luster

1Ply 1.5Mil
CS-650-CT-8065

SOLAR PROPERTIES

Visible Light Transmission	83%
Ultraviolet Rejected	>99%
Infra Red Heat Rejected	65%
Total Solar Energy Rejected	32%
Glare Reduction	5%
Shading Coefficient	0.77
SHGC(G-Value)	0.68



Visible Light Transmittance



Solar Energy Rejection

Reduce Heat Causing
IR Rays with Cosmo
Sunshield Ultra Cool Series





High Heat Rejection- Ultra Cool Series


2Ply 1.5Mil
CS-650-AC-7090

SOLAR PROPERTIES

Visible Light Transmission	70%
Ultraviolet Rejected	>99%
Infra Red Heat Rejected	93%
Total Solar Energy Rejected	49%
Glare Reduction	25%
Shading Coefficient	0.57
SHGC(G-Value)	0.52



70%
Visible Light Transmittance



49%
Solar Energy Rejection

Ultra Cool Series


1Ply 1.5Mil
CS-650-AC-7465

SOLAR PROPERTIES

Visible Light Transmission	74%
Ultraviolet Rejected	>99%
Infra Red Heat Rejected	65%
Total Solar Energy Rejected	37%
Glare Reduction	17%
Shading Coefficient	0.71
SHGC(G-Value)	0.63



74%
Visible Light Transmittance



37%
Solar Energy Rejection




Ultra Cool Series

2Ply 1.5Mil
CS-501-PAGP-5045


SOLAR PROPERTIES

Visible Light Transmission	50%
Ultraviolet Rejected	>99%
Infra Red Heat Rejected	45%
Total Solar Energy Rejected	41%
Glare Reduction	44%
Shading Coefficient	0.66
SHGC(G-Value)	0.59



50%

Visible Light Transmittance



41%

Solar Energy Rejection

Ultra Cool Series

2Ply 1.5Mil
CS-650-PACGP-5095

SOLAR PROPERTIES

Visible Light Transmission	57%
Ultraviolet Rejected	>99%
Infra Red Heat Rejected	92%
Total Solar Energy Rejected	52%
Glare Reduction	35%
Shading Coefficient	0.54
SHGC(G-Value)	0.48



57%

Visible Light Transmittance



52%

Solar Energy Rejection



1st Floor, Uppal's Plaza, District Centre, M-6, Jasola, Delhi-110025

+91-8069168989 | ✉ sunshield@cosmofilms.com

🌐 www.cosmosunshield.com